




MYRA UP/DOWN
WL, QPAR51

220-240V ~50/60Hz
Material: Aluminium / Glas



GU10 <35W
Ø: 5 cm L: 5,7 cm



LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h





Art. Nr. 1004972



■ Aufbaumontage Rahmen
Art. Nr. 233215



Variante	Art. Nr.
2xGU10	
■ anthrazit	233115
2xGU10	
■ grau	233114




SITRA UP/DOWN
WL

220-240V ~50/60Hz
Systemleistung: 18W
Material: Aluminium / Glas



Up/Down	488lm 3000K	A → G
		A → G E

Variante	Art. Nr.
Up: 488lm 3000K CRI80	
Down: 488lm 3000K CRI80	
■ anthrazit	1002018

SITRA UP/DOWN
WL, TCR-TSE

220-240V ~50/60Hz
Material: Aluminium / Glas



GX53 <9W
Ø: 7,5 cm L: 3,5 cm






LED GX53 | 6W | 120°
4000K | 550lm | EEK=F
6kWh/1000h



Art. Nr. 1005269

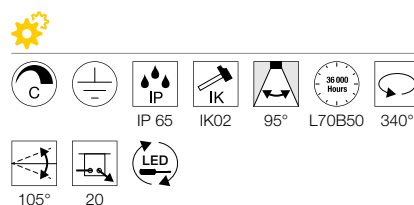


Variante	Art. Nr.
2xGX53	
■ anthrazit	230365

TODAY PRO
Display

220-240V ~50/60Hz | 640mA
Systemleistung: 29W
Material: Aluminium

Art. Nr.	Output	Color
1000880, 1000881	2800lm / 4000K	A → G
		A → E



Variante	Art. Nr.
2800lm 4000K CRI70 ■ schwarz	1000880
2800lm 4000K CRI70 □ weiß	1000881

ESKINA D
Display, PHASE

220-240V ~50/60Hz | 350mA
Systemleistung: 14,5W
Material: Aluminium

Art. Nr.	Output	Color
1002905	1000lm / 3000/4000K	A → G
		A → E

Variante	Art. Nr.
1000lm 3000/4000K CRI80 ■ anthrazit	1002905

MYRA DISPLAY
WL, curved, QPAR51

220-240V ~50/60Hz
Material: Aluminium



Art. Nr.	Output	Color
GU10 <50W Ø: 5 cm L: 5,7 cm		A → G

Art. Nr.	Output	Color
LED GU10 51mm 4W 36° 2700K 270lm EEK=G 4kWh/1000h		A → G



Art. Nr. 1004972

Art. Nr.	Output	Color
■ Aufbaumontage Rahmen		A → G
Art. Nr. 233215		A → E




Variante	Art. Nr.
1xGU10 ■ anthrazit	233135
1xGU10 ■ grau	233134

LED SPOT
SP

100-240V ~50/60Hz | 240mA
Systemleistung: 6W
Material: Aluminium / Glas

NAUTILUS
WL QPAR51

220-240V ~50/60Hz
Material: Aluminium

MYRA
CW, single, QPAR51

220-240V ~50/60Hz
Material: Aluminium / Glas
• Adapterrahmen zur Aufputzmontage erhältlich



1004649, 1004957	400lm 3000K	A → G F
---------------------	----------------	------------



GU10 <11W
Ø: 5 cm L: 8,3 cm



LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Art. Nr. 1004972



GU10 <50W
Ø: 5 cm L: 5,7 cm



LED GU10 51mm | 4W | 36°
3000K | 270lm | EEK=G
4kWh/1000h

Art. Nr. 1004973



■ NAUTILUS | Montageplatte
Art. Nr. 1002884



■ NAUTILUS | Montageplatte
Art. Nr. 1002884



■ Aufbaumontage Rahmen
Art. Nr. 233215



Variante	Art. Nr.
400lm 3000K CRI80 ■ anthrazit	1004649
400lm 3000K CRI80 ■ rost	1004957

Variante	Art. Nr.
1xGU10 ■ schwarz	1002867

Variante	Art. Nr.
1xGU10 ■ anthrazit	233105
1xGU10 ■ grau	233104